

12025


HOUSING	Thermoplastic PBT, UL94V-O
IMPELLER	Thermoplastic PBT, UL94V-O
BEARING	Ball or Sleeve
INSULATION RESISTANCE	10 M Ohms min. @ 500 Vdc
DIELECTRIC STRENGTH	5 mA max. at 500 VAC 60 Hz for 1 minute
OPERATING TEMPERATURE	-10 to +60 °C
WEIGHT	165 g
ROHS COMPLIANCE	Yes




SIZE

120 x 120 x 25 mm

DIMENSION

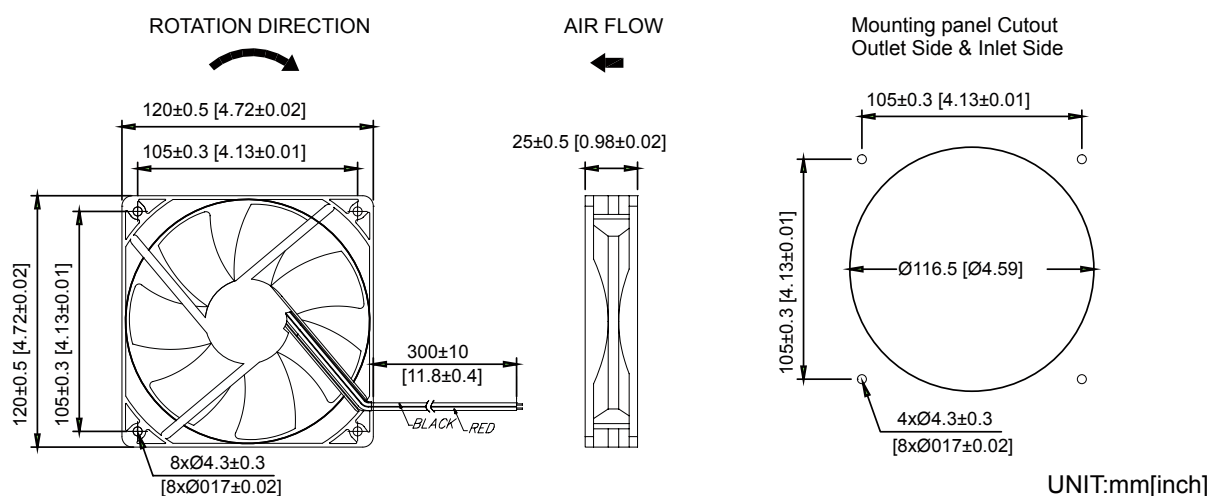

AIR PERFORMANCE

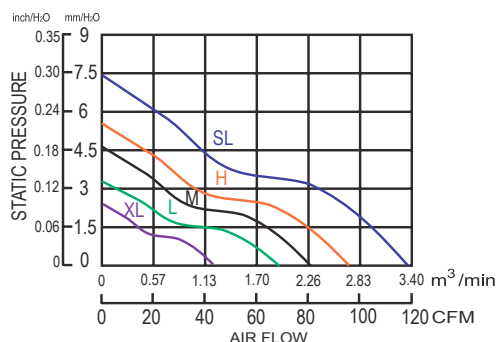

SPECIFICATION

MODEL NO	Rated Voltage	Rated Current	Input Power	Speed	Maximum Air Pressure	Maximum Air Flow	Noise
	VDC	A	Watt	R.P.M.	inchH ₂ O - mmH ₂ O	CFM - m ³ /min	dB-A
ART1664-12025-12-SLBK	12	0.45	5.40	3100	0.29 - 7.40	119.4 - 3.88	40
ART1665-12025-12-HBK	12	0.25	3.00	2500	0.22 - 5.30	90 - 2.60	36
ART1666-12025-12-MBK	12	0.21	2.52	2200	0.18 - 4.60	80.6 - 2.28	31
ART1667-12025-12-LBK	12	0.19	2.28	1900	0.14 - 3.40	69.6 - 1.97	29
ART1668-12025-12-XLBK	12	0.08	0.96	1200	0.08 - 2.10	40.6 - 1.15	19
ART1669-12025-24-SLBK	24	0.31	7.44	3100	0.29 - 7.40	119.4 - 3.88	40
ART1110-12025-24-HBK	24	0.13	3.12	2500	0.22 - 5.30	90 - 2.60	36
ART1670-12025-24-MBK	24	0.12	2.88	2200	0.18 - 4.60	80.6 - 2.28	31
ART1671-12025-24-LBK	24	0.15	3.60	1900	0.14 - 3.40	69.6 - 1.97	29
ART1672-12025-24-XLBK	24	0.05	1.20	1200	0.08 - 2.10	40.6 - 1.15	19