

16062


HOUSING	Aluminium die casting, painted black
IMPELER	Thermoplastic PBT, UL94V-0
BEARING	Ball
MOTOR TYPE	Shaded pole motor
TERMINATION	Terminals
OPERATION VOLTAGE	85 to 125 VAC for 115V type 185 to 245 VAC for 230V type
DIELECTRIC STRENGTH	1500 VAC for 1 minute
INSULATION	Class A
INSULATION RESISTANCE	10 M Ohms min. @ 500 Vdc
OPERATING TEMPERATURE	-10 to +70 °C
SAFETY	Thermally protected
WEIGHT	1.4 kg
ROHS COMPLIANCE	Yes
ADDITIONAL FUNCTION	Tropi



SIZE



160 x 162 x 62 mm

DIMENSION

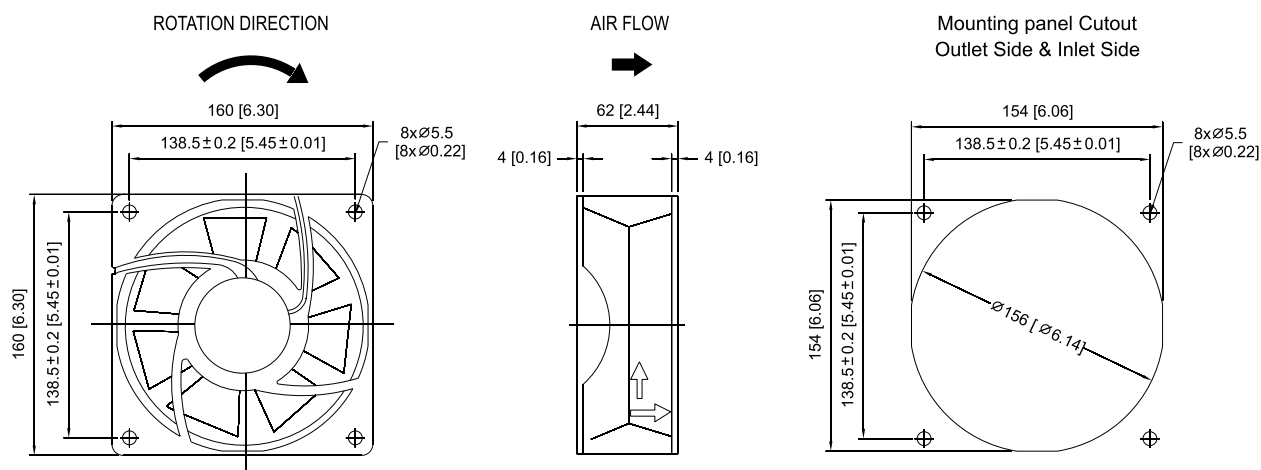

AIR PERFORMANCE

UNIT:mm[inch]

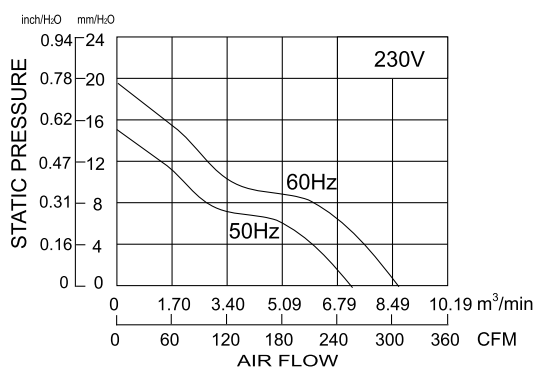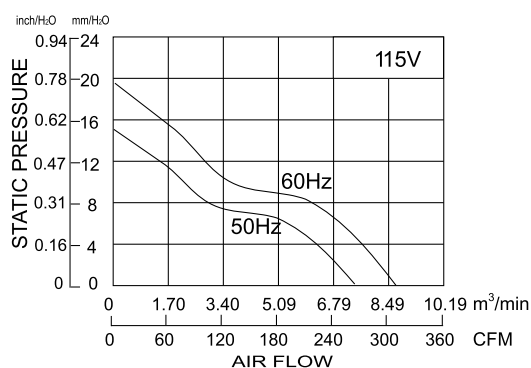

SPECIFICATION

MODEL NO	Rated Voltage	Frequency	Rated Current	Input Power	Speed	Maximum Air Pressure	Maximum Air Flow	Noise
	VAC	Hz	A	Watt	R.P.M.	inchH ₂ O - mmH ₂ O	CFM - m ³ /min	dB-A
ART1335-16062-115-H	115	50/60	0.45/0.50	52/60	2900/3400	0.58/0.76 - 14.7/19.3	261/307 - 7.4/8.7	60/64
ART1336-16062-230-H	230	50/60	0.23/0.25	51/57	2900/3400	0.58/0.76 - 14.7/19.3	261/305 - 7.4/8.6	60/64