

21070


HOUSING	Aluminum Alloy, Blue
IMPELLER	PA6 UL94V-0 Reinforce Plastic, Blue
BEARING	Ball
TERMINATION	Lead Wire
OPERATING VOLTAGE RANGE	200 VAC to 240 VAC for 220 V Type
DIELECTRIC STRENGTH	1,500 VAC for 1 minute
INSULATION	Class B
INSULATION RESISTANCE	100,000 Ohms min. @500 VDC
OPERATING TEMPERATURE	-10°C to + 70°C
SAFETY	Thermally Protected (Auto Restart)
WEIGHT	1700g
ROHS COMPLIANCE	Yes



SIZE


210X210X70mm (8.3"X8.3"X2.8")

DIMENSION

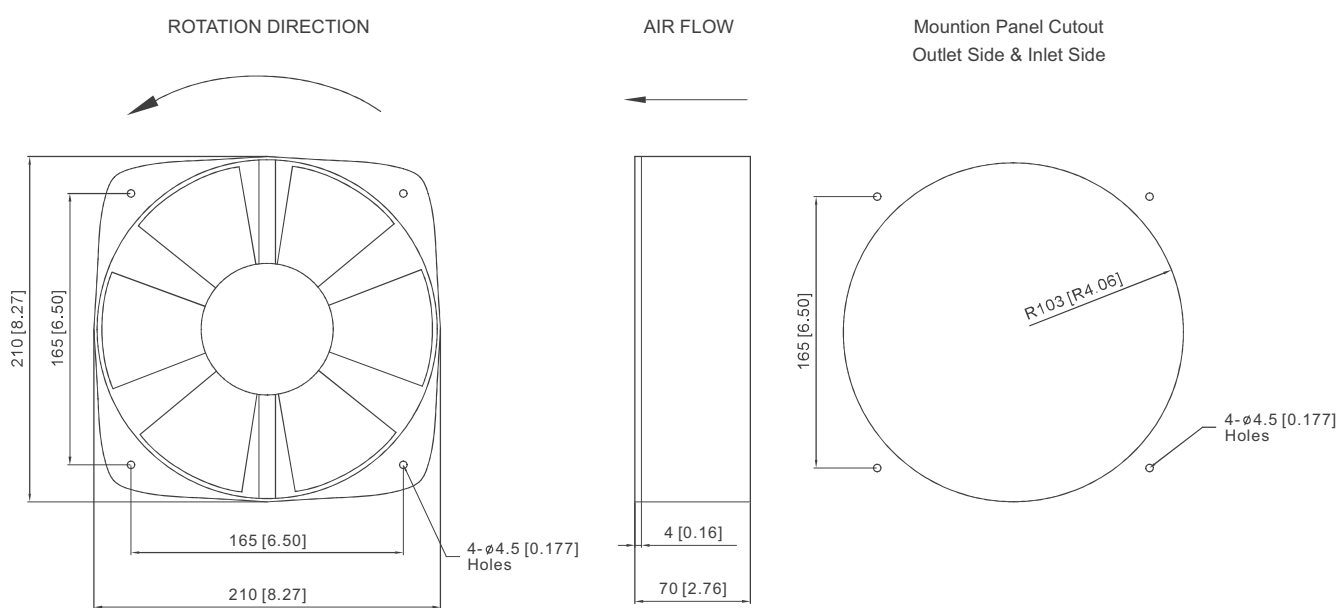

UNIT:mm(inch)

AIR PERFORMANCE

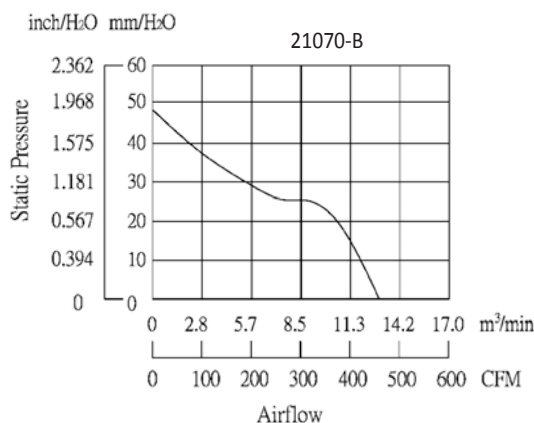

SPECIFICATION

MODEL NO.	RATED VOLTAGE (V)	FREQUENCY (Hz)	RATED CURRENT (A)	INPUT POWER (W)	SPEED RPM	MAX. AIR PRESSURE InchH ₂ O mmH ₂ O	AIR FLOW m ³ /min CFM	NOISE dB (A) @1M
Art1085 21070-230V HB	220	50	0.3	50	2600	1.85 47	13.0 459	70