

22060

HOUSING
IMPELER
BEARING
MOTOR TYPE
TERMINATION
OPERATION VOLTAGE

DIELECTRIC STRENGTH
INSULATION
INSULATION RESISTANCE
OPERATING TEMPERATURE
SAFETY
WEIGHT
ROHS COMPLIANCE


Aluminium die casting, painted black
Thermoplastic PBT, UL94V-0
Ball
Shaded pole motor
Terminals
85 to 125 VAC for 115V type
185 to 245 VAC for 230V type
1500 VAC for 1 minute
Class A
10 M Ohms min. @ 500 Vdc
-10 to +70 °C
Impedance protected
1400 g
Yes




SIZE

Ø220 x 60 mm

DIMENSION

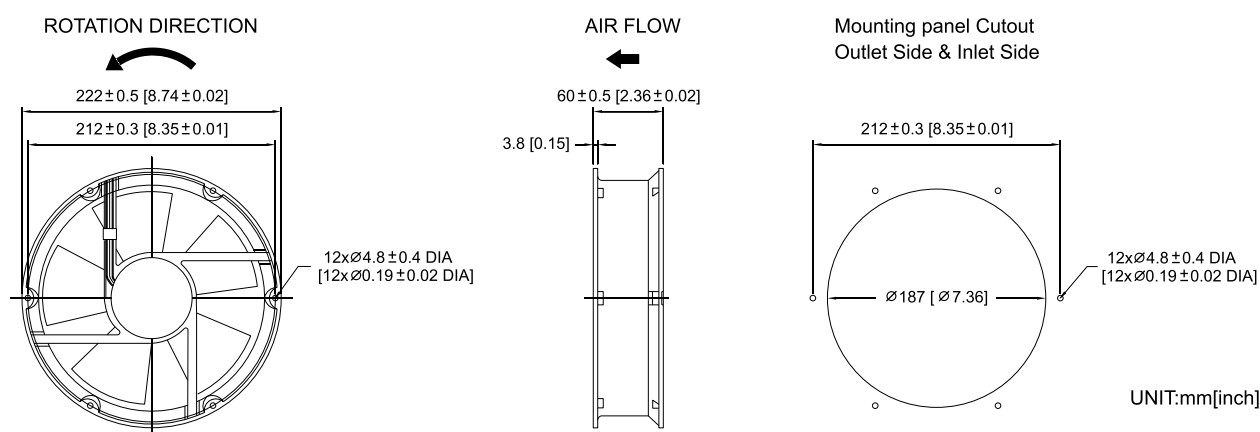

AIR PERFORMANCE

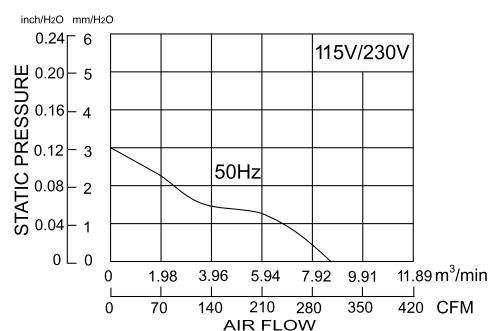

SPECIFICATION

MODEL NO	Rated Voltage	Frequency	Rated Current	Input Power	Speed	Maximum Air Pressure	Maximum Air Flow	Noise
	VAC	Hz	A	Watt	R.P.M.	inchH ₂ O - mmH ₂ O	CFM - m ³ /min	dB-A
ART1279-22060-230-H	230	50	0.3	44	2200	0.11 - 3.0	300 - 8.49	56
ART1280-22060-230-H-TROPI	230	50	0.3	44	2200	0.11 - 3.0	300 - 8.49	56
ART1281-22060-115-H	115	50	0.7	52	2200	0.11 - 3.0	300 - 8.49	56
ART1282-22060-115-H-TROPI	115	50	0.7	52	2200	0.11 - 3.0	300 - 8.49	56