

28080M


MOTOR TYPE	Outer rotor, three phase motor
HOUSING	Aluminium die casting
IMPELER	Metal
BEARING	Ball
OPERATING TEMPERATURE	-25 to +60 °C
INSULATION RESISTANCE	10 M Ohms min. @ 500 Vdc
DIELECTRIC STRENGTH	5 mA at 500 VAC for 1 minute
WEIGHT	2.5 kg
ROHS COMPLIANCE	Yes




SIZE

280 x 280 x 80 mm

DIMENSION

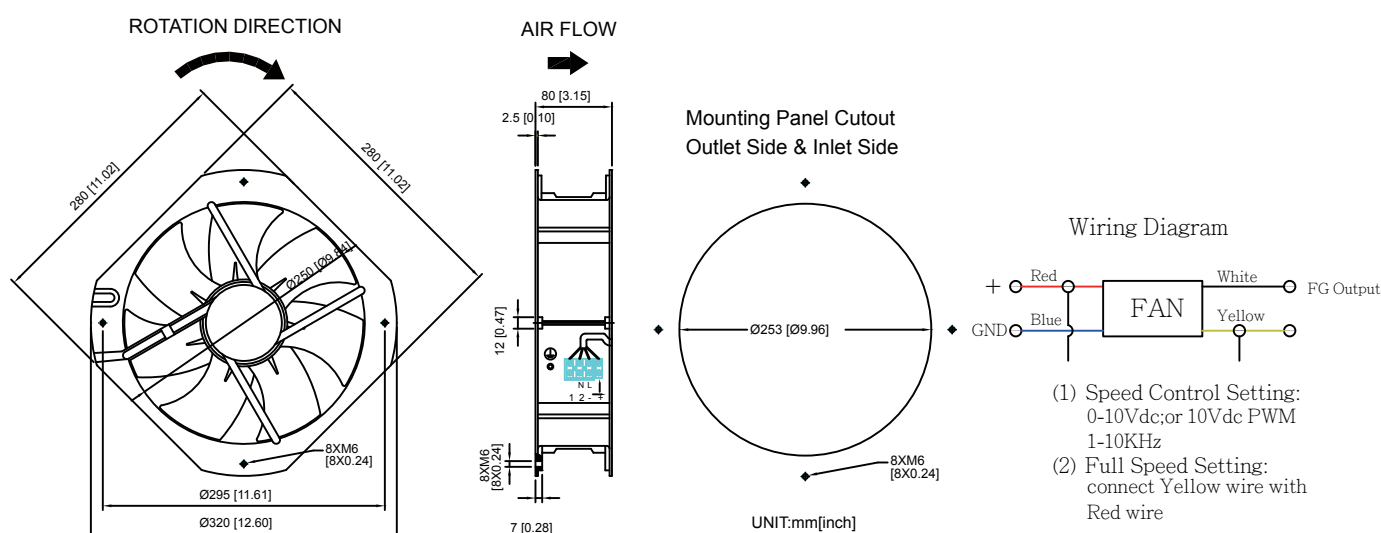

AIR PERFORMANCE

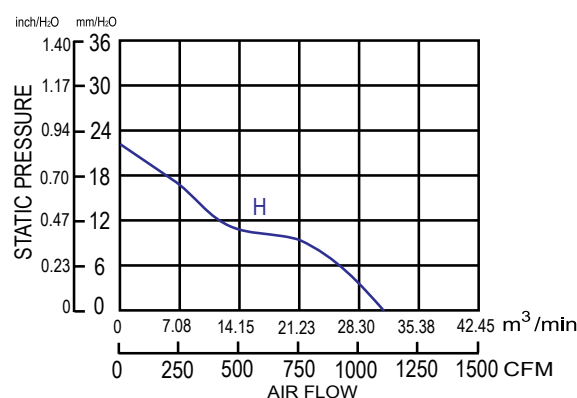

SPECIFICATION

MODEL NO	Rated Voltage	Rated Current	Input Power	Speed	Maximum Air Pressure	Maximum Air Flow	Noise
	VDC	A	Watt	R.P.M.	inchH ₂ O - mmH ₂ O	CFM - m ³ /min	dB-A
ART1565-28080-24	24	4.4	105.6	2750	0.88 - 22.4	1118 - 31.6	69
ART1566-28080-48	48	2.2	105.6	2750	0.88 - 22.4	1118 - 31.6	69