


4028K


HOUSING	Thermoplastic PBT, UL94V-0
IMPELER	Thermoplastic PBT, UL94V-0
BEARING	Ball
INSULATION	Class A
OPERATING TEMPERATURE	-10 to +60 °C
INSULATION RESISTANCE	10 M Ohms min. @ 500 Vdc
DIELECTRIC STRENGTH	5 mA at 500 VAC for 1 minute
WEIGHT	40 g
ROHS COMPLIANCE	Yes

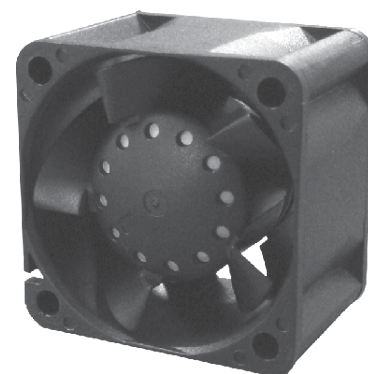


SIZE

40 x 40 x 28 mm

DIMENSION

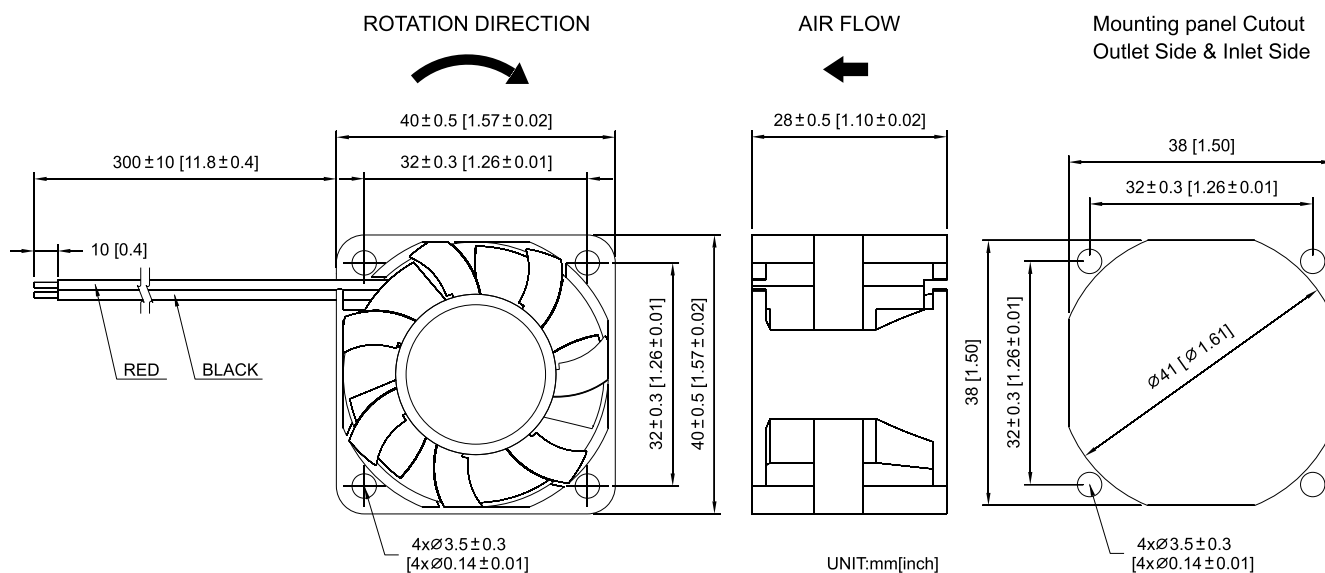

AIR PERFORMANCE

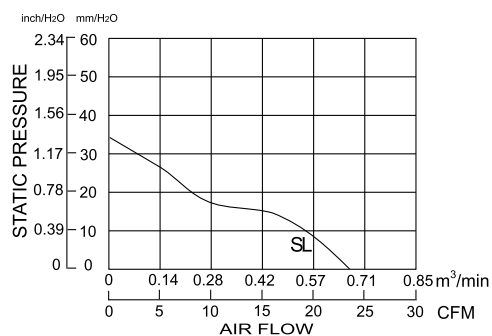

SPECIFICATION

MODEL NO	Rated Voltage	Rated Current	Input Power	Speed	Maximum Air Pressure	Maximum Air Flow	Noise
	VDC	A	Watt	R.P.M.	inchH ₂ O - mmH ₂ O	CFM - m ³ /min	dB-A
ART1813-4028-24-K	24	0.27	6.48	13000	1.32 - 33.7	23.8 - 0.67	54