

6025


HOUSING	Thermoplastic PBT, UL94V-O
IMPELER	Thermoplastic PBT, UL94V-O
BEARING	Ball or Sleeve
INSULATION RESISTANCE	10 M Ohms min. @ 500 Vdc
DIELECTRIC STRENGTH	5 mA max. at 500 VAC 60 Hz for 1 minute
OPERATING TEMPERATURE	-10 to +70 °C
WEIGHT	57 g
ROHS COMPLIANCE	Yes




SIZE

60 x 60 x 25 mm

DIMENSION

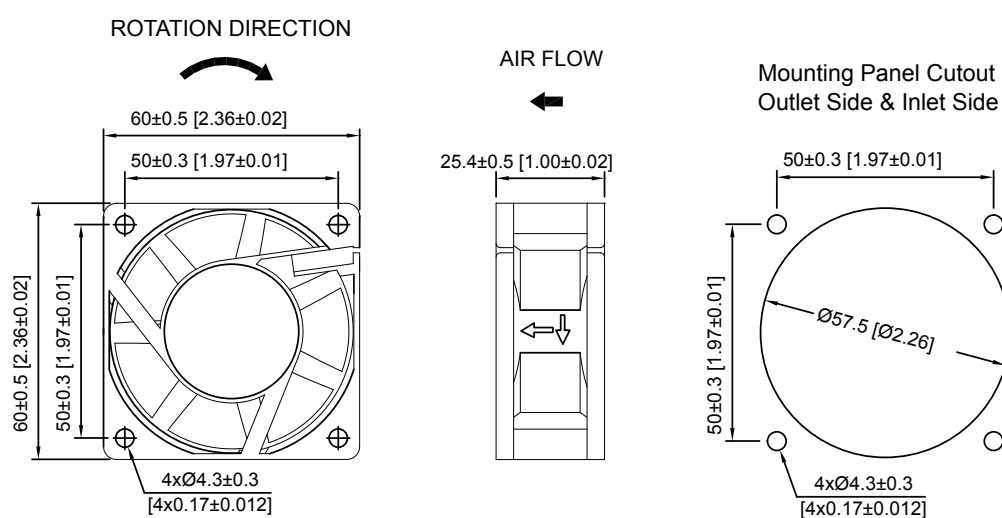

AIR PERFORMANCE

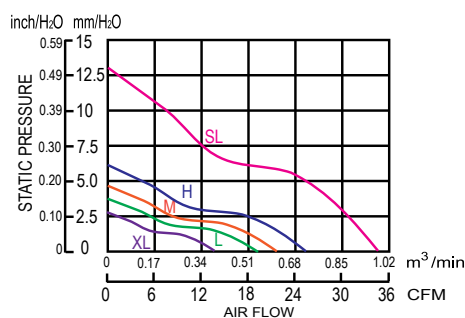

SPECIFICATION

MODEL NO	Rated Voltage	Rated Current	Input Power	Speed	Maximum Air Pressure	Maximum Air Flow	Noise
	VDC	A	Watt	R.P.M.	inchH ₂ O - mmH ₂ O	CFM - m ³ /min	dB-A
ART1788-6025-12-SLK	12	0.36	4.32	6800	0.51 - 13.00	34.8 - 0.99	46.5
ART1789-6025-12-HLK	12	0.35	4.20	5000	0.26 - 6.50	25.6 - 0.73	40.0
ART1790-6025-12-MLK	12	0.16	1.92	4250	0.19 - 4.83	21.5 - 0.61	34.0
ART1791-6025-12-LLK	12	0.12	1.44	3600	0.14 - 3.56	18.5 - 0.52	31.0
ART1792-6025-12-XLK	12	0.10	1.20	3100	0.10 - 2.54	14.1 - 0.40	26.0
ART1793-6025-24-HLK	24	0.20	4.80	5000	0.26 - 6.50	25.6 - 0.73	40.0
ART1794-6025-24-MLK	24	0.11	2.64	4250	0.19 - 4.83	21.5 - 0.61	34.0
ART1795-6025-24-LLK	24	0.08	1.92	3600	0.14 - 3.56	18.5 - 0.52	31.0
ART1796-6025-24-XLK	24	0.06	1.44	3100	0.10 - 2.54	14.1 - 0.40	26.0
ART1797-6025-48-HLK	48	0.12	5.76	5000	0.26 - 6.50	25.6 - 0.73	40.0
ART1798-6025-48-MLK	48	0.07	3.36	4250	0.19 - 4.83	21.5 - 0.61	34.0
ART1799-6025-48-LLK	48	0.06	2.88	3600	0.14 - 3.56	18.5 - 0.52	31.0
ART1800-6025-48-XLK	48	0.05	2.40	3100	0.10 - 2.54	14.1 - 0.40	26.0