


6030

60X60X30mm (2.36"X2.36"x1.18")

CE

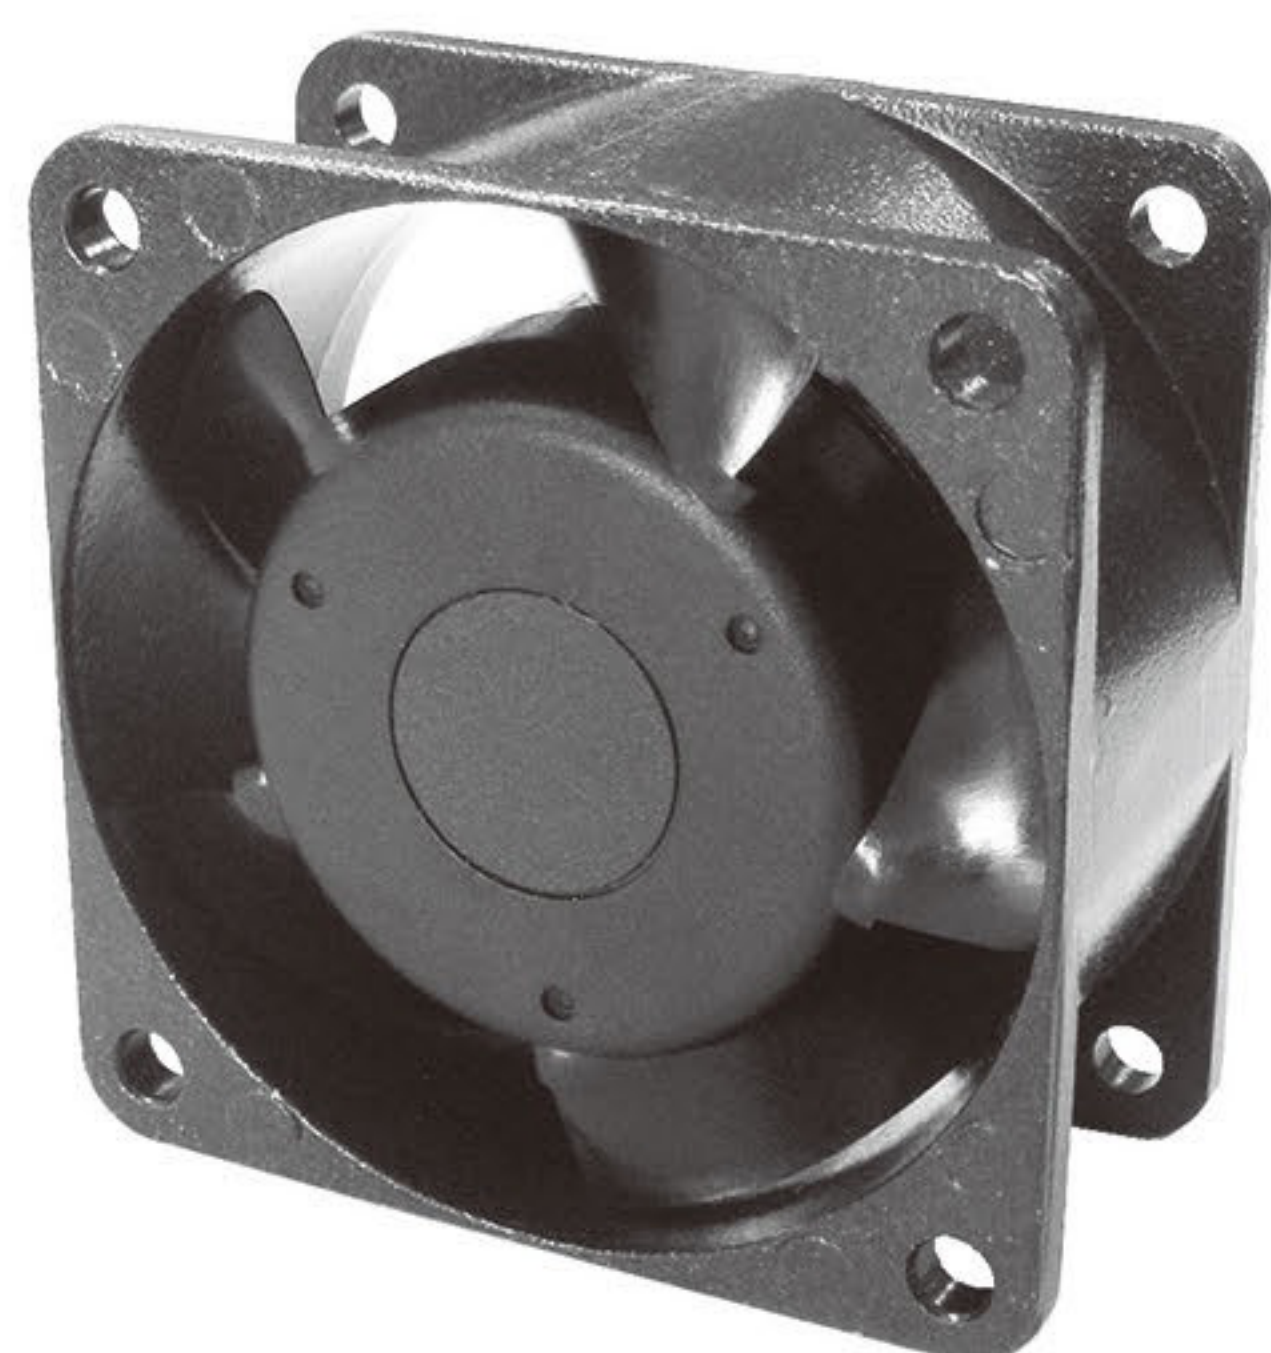


HOUSING	Aluminum Die Casting, Painted Black
IMPELLER	Thermoplastic PBT, UL94V-0
BEARING	Ball
OPERATING TEMPERATURE	-10°C to + 70°C
INSULATION	Class A
OPERATING VOLTAGE RANGE	103 VAC to 126 VAC for 115V Type 207 VAS to 253 VAC for 230V Type
DIELECTRIC STRENGTH	5mA Max. at 1500 VAC for 1 second
INSULATION RESISTANCE	10M Ω min. @500 VDC
MOTOR TYPE	Shaded Pole Motor
SAFETY	Impedance Protected
TERMINATION	Lead wire
WEIGHT	140g
ROHS COMPLIANCE	Yes
IP LEVEL	IP21 (Special IP Rating On Request)

60 mm

60 mm

DIMENSION

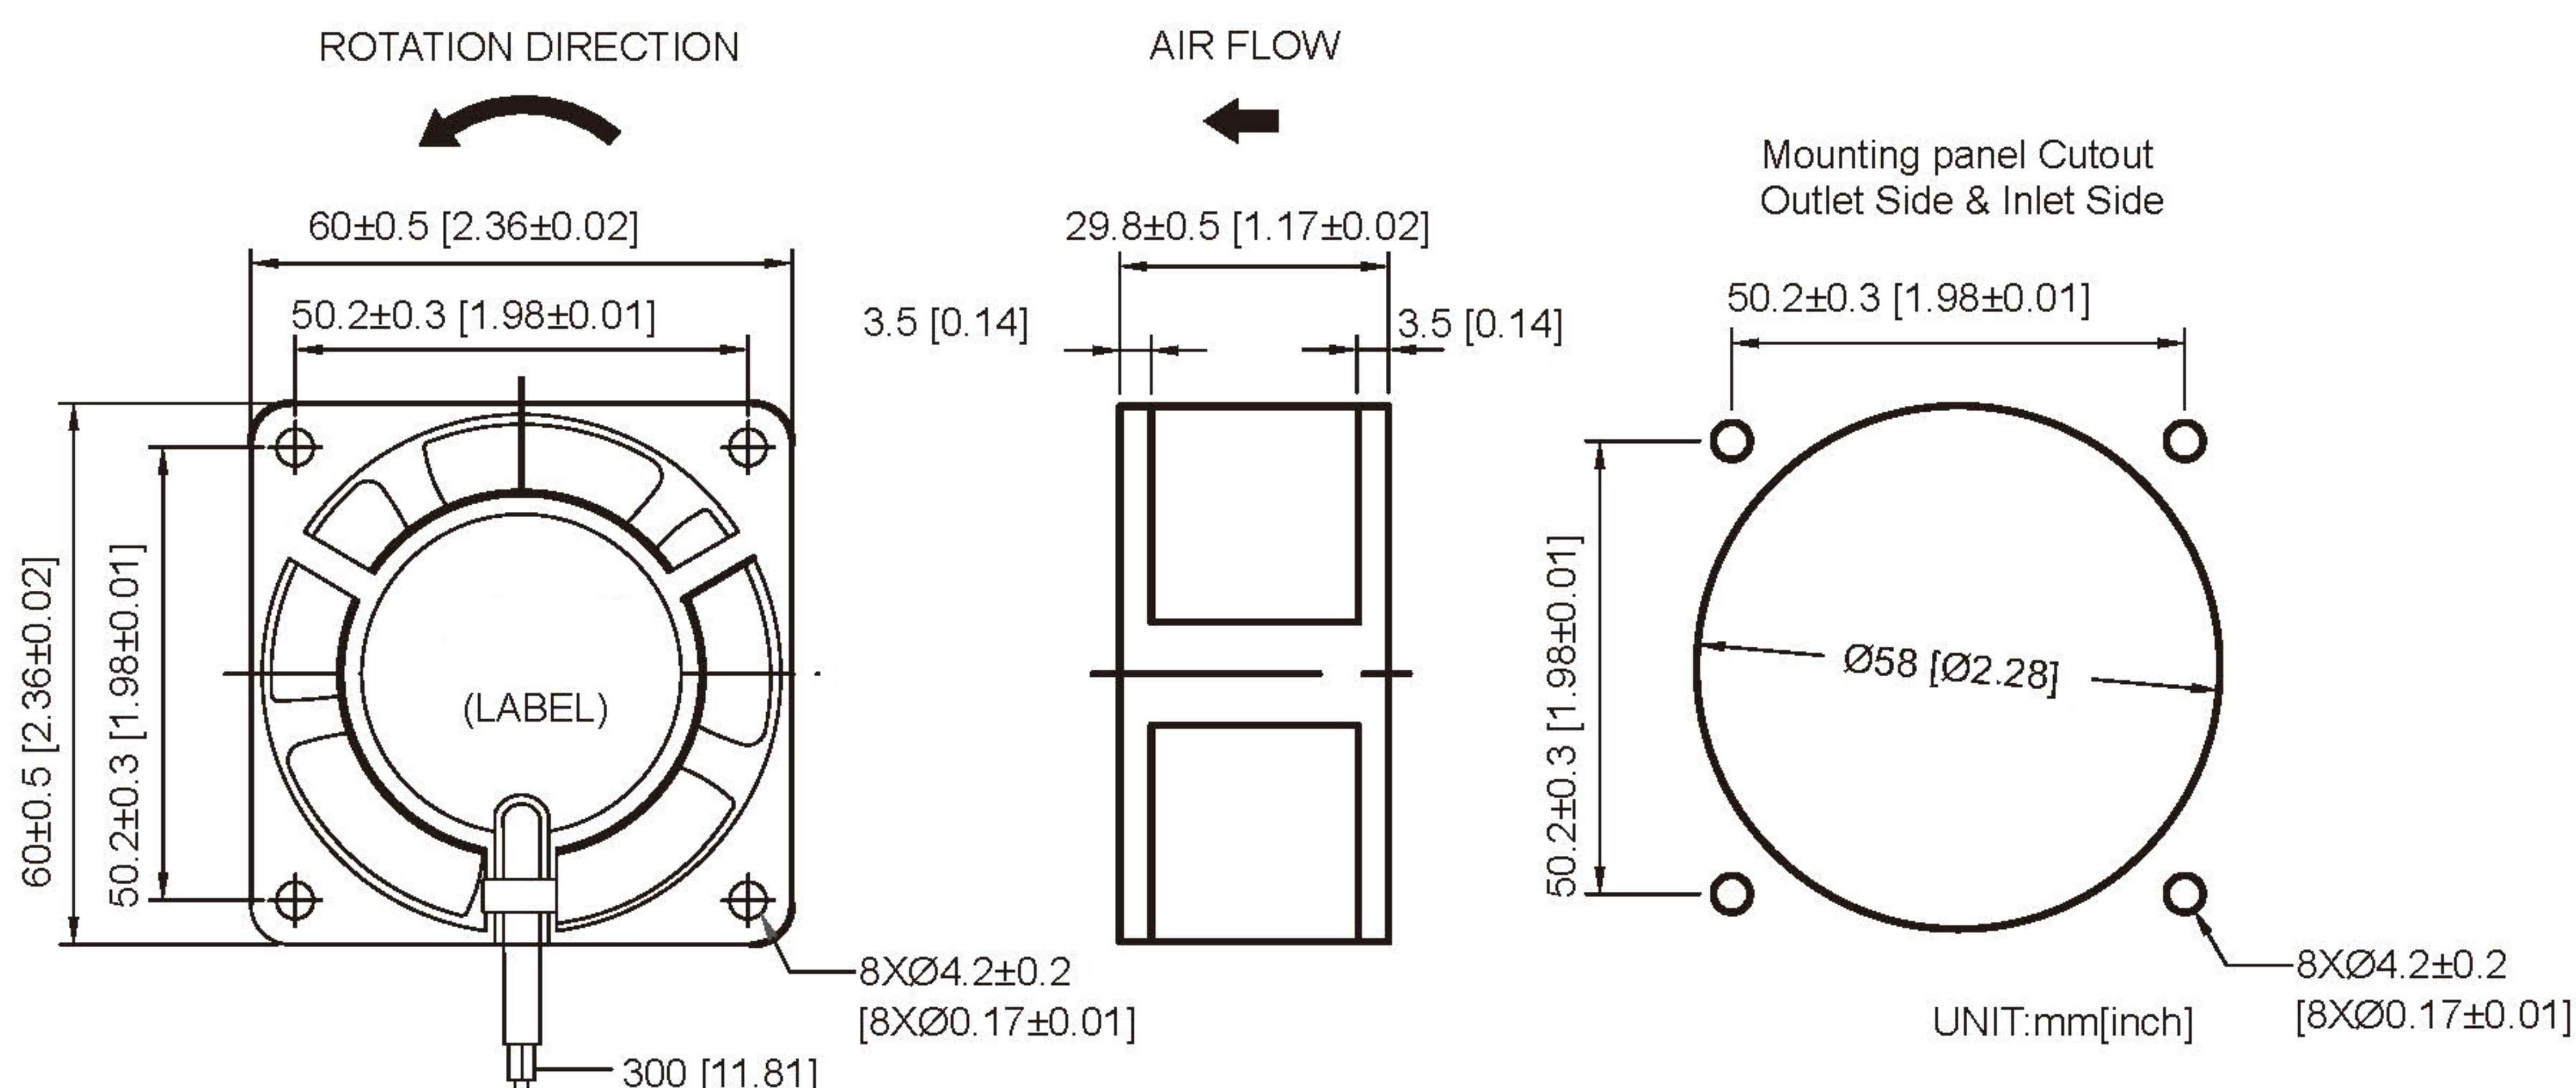

SPECIFICATION

MODEL NO.	RATED VOLTAGE (V)	FREQUENCY (Hz)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE inchH ₂ O mmH ₂ O	MAX. AIR FLOW CFM m ³ /min	NOISE dB(A) @1M
Art2249	115	50/60	0.063/0.051	5.2/4.0	2400/3000	0.07/0.11 1.78/2.79	8.1/10.24 0.23/0.29	27/28
Art2250	230	50/60	0.040/0.032	6.0/4.5	2400/3000	0.07/0.11 1.78/2.79	8.1/10.24 0.23/0.29	27/28

AIR PERFORMANCE

