

6038


HOUSING	Thermoplastic PBT, UL94V-O
IMPELER	Thermoplastic PBT, UL94V-O
BEARING	Ball
INSULATION RESISTANCE	10 M Ohms min. @ 500 Vdc
DIELECTRIC STRENGTH	5 mA max. at 500 VAC 60 Hz for 1 minute
OPERATING TEMPERATURE	-10 to +60 °C
WEIGHT	109 g
ROHS COMPLIANCE	Yes




SIZE

60 x 60 x 38 mm

DIMENSION

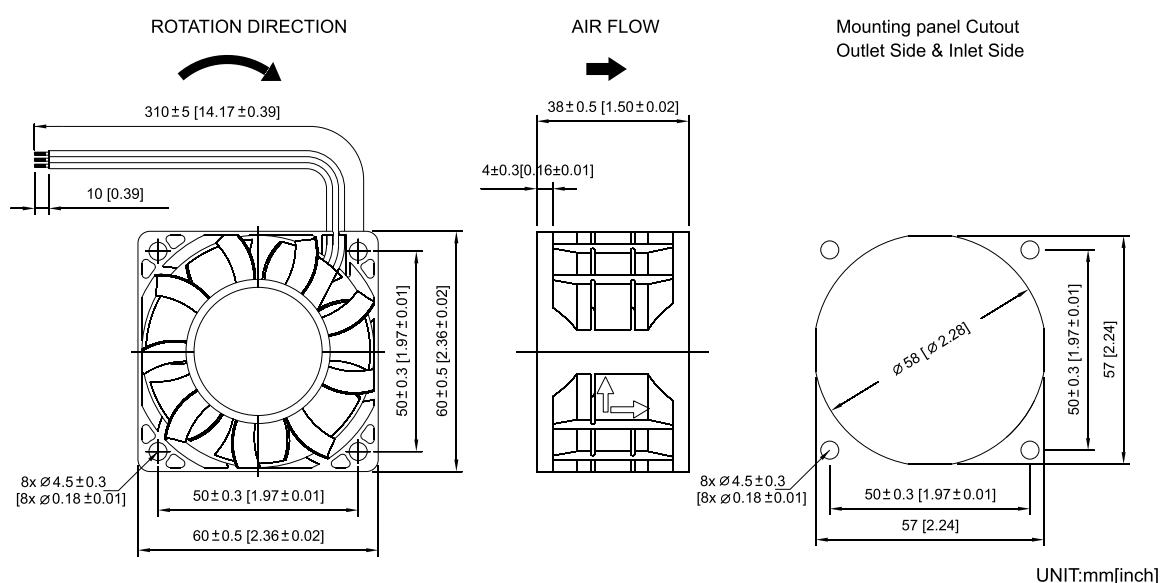

AIR PERFORMANCE

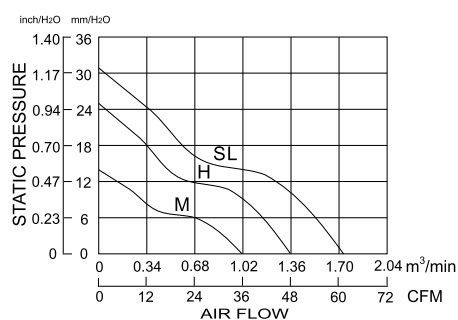

SPECIFICATION

MODEL NO	Rated Voltage	Rated Current	Input Power	Speed	Maximum Air Pressure	Maximum Air Flow	Noise
	VDC	A	Watt	R.P.M.	inchH ₂ O - mmH ₂ O	CFM - m ³ /min	dB-A
ART1754-6038-12-SL	12	1.40	16.80	10000	1.20 - 30.48	61 - 1.73	63.6
ART1755-6038-12-H	12	0.64	7.68	8000	0.98 - 24.99	48 - 1.36	58.0
ART1756-6038-12-M	12	0.28	3.36	6000	0.56 - 14.29	36 - 1.02	49.8
ART1757-6038-24-SL	24	0.70	16.80	10000	1.20 - 30.48	61 - 1.73	63.6
ART1758-6038-24-H	24	0.34	8.16	8000	0.98 - 24.99	48 - 1.36	58.0
ART1759-6038-24-M	24	0.16	3.84	6000	0.56 - 14.27	36 - 1.02	49.8
ART1760-6038-48-SL	48	0.38	18.24	10000	1.20 - 30.48	61 - 1.73	63.6
ART1761-6038-48-H	48	0.20	9.60	8000	0.98 - 24.99	48 - 1.36	58.0
ART1762-6038-48-M	48	0.09	4.32	6000	0.56 - 14.27	36 - 1.02	49.8