

8032


HOUSING	Thermoplastic PBT, UL94V-0
IMPELER	Thermoplastic PBT, UL94V-0
BEARING	Ball Bearings
MOTOR TYPE	DC Brushless Fan Motor
TERMINATION	Lead Wire Red(+), Black(-), UL1007 AWG24
DIELECTRIC STRENGTH	500 VDC for 1 minute
INSULATION	Class A
INSULATION RESISTANCE	10 M Ohms min. @ 500 VDC
OPERATING TEMPERATURE	-10 to +70 °C - Humidity 95 % RH
LIFE	50.000 hrs at 25°C
SAFETY APPROVALS	UL and TUV
WEIGHT	108 g
ROHS COMPLIANCE	Yes




SIZE

80 x 80 x 32 mm

DIMENSION

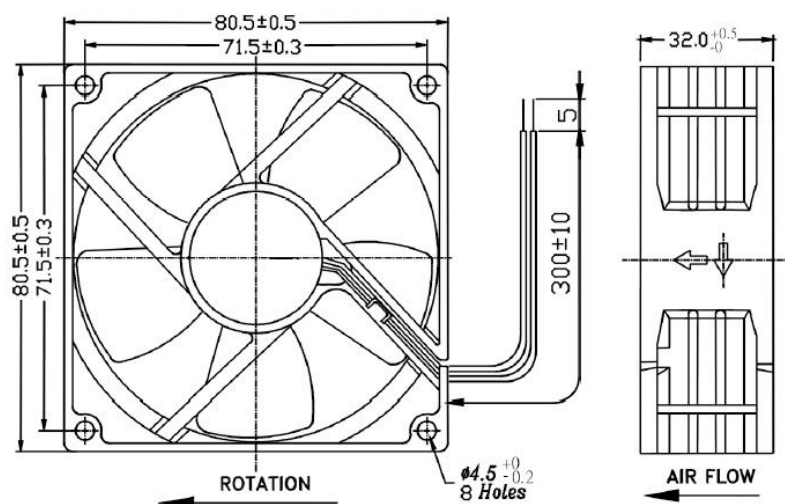

AIR PERFORMANCE

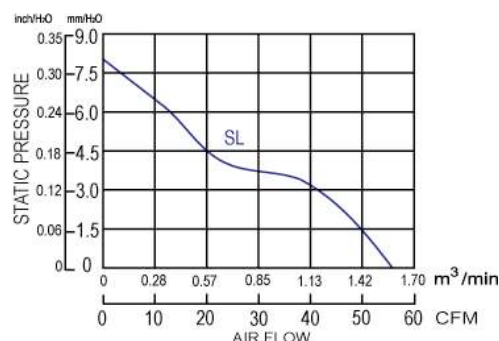

SPECIFICATION

MODEL NO	Rated Voltage	Voltage Range	Start Voltage	Rated Current	Input Power	Speed	Maximum Air Pressure	Maximum Air Flow	Noise
	VDC	VDC	VDC	A	Watt	R.P.M.	mmH ₂ O	CFM	dB-A
ART1537-8032-24-IP55	24	21.6 to 26.4	17	0.15	3.6	4200	8.026	55.386	44
ART1538-8032-24-A	24	21.6 to 26.4	17	0.15	3.6	4200	8.026	55.386	44