

9225K


HOUSING	Thermoplastic PBT, ULV-94V-0
IMPELER	Thermoplastic PBT, ULV-94V-0
BEARING	Ball
TERMINATION	Leadwire
INSULATION RESISTANCE	10 M Ohms min. @ 500 Vdc
OPERATION TEMPERATURE	-10 to +60 °C
WEIGHT	120 g
ROHS COMPLIANCE	Yes




SIZE

92 x 92 x 25 mm

DIMENSION

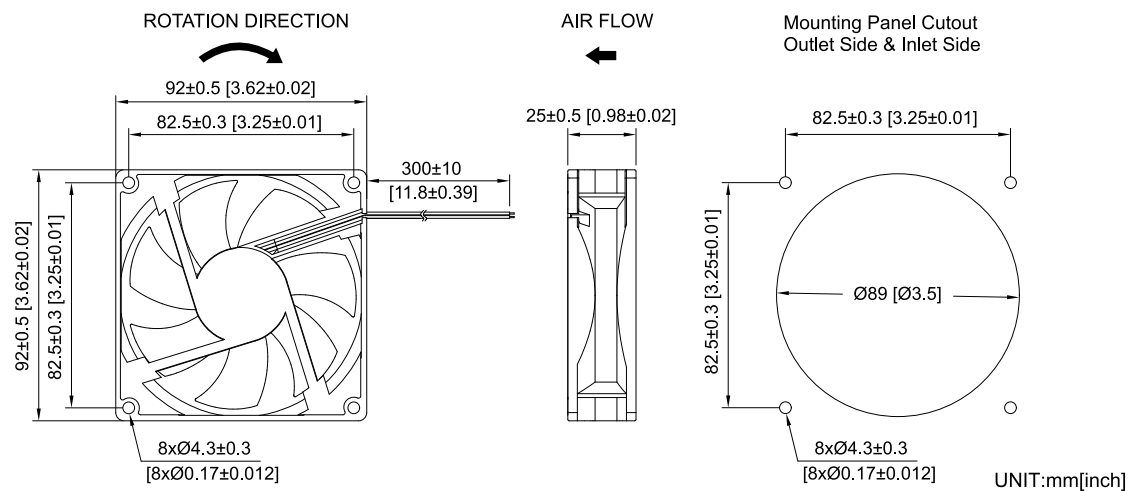

AIR PERFORMANCE

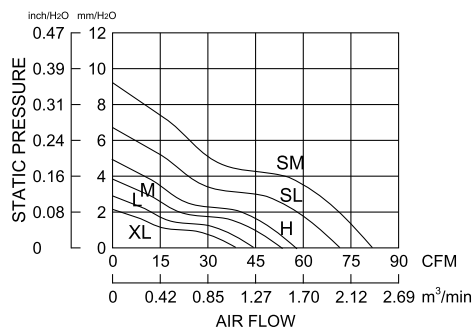

SPECIFICATION

MODEL NO	Rated Voltage	Input Current	Input Power	Speed	Maximum Air Pressure	Maximum Air Flow	Noise
	VDC	Amp	Watt	R.P.M.	inchH ₂ O / mmH ₂ O	CFM / m ³ /min	dB-A
ART1232-9225-12-SMBK	12	0.40	4.80	4500	0.40 / 9.2	81.0 / 2.29	49
ART1233-9225-12-SLBK	12	0.42	5.04	3800	0.26 / 6.6	69.2 / 1.96	45
ART1234-9225-12-HBK	12	0.31	3.72	3200	0.18 / 4.7	58.3 / 1.65	38
ART1235-9225-12-MBK	12	0.25	3.00	2850	0.16 / 3.9	52.1 / 1.48	34
ART1111-9225-12-LBK	12	0.19	2.28	2450	0.11 / 2.9	44.8 / 1.27	30
ART1236-9225-12-XLBK	12	0.14	1.68	2100	0.09 / 2.2	39.2 / 1.11	25
ART1237-9225-24-SLBK	24	0.24	5.76	3800	0.26 / 6.6	69.2 / 1.96	45
ART1112-9225-24-HBK	24	0.22	5.28	3200	0.18 / 4.7	58.3 / 1.65	38
ART1238-9225-24-MBK	24	0.16	3.84	2850	0.16 / 3.9	52.1 / 1.48	34
ART1239-9225-24-LBK	24	0.11	2.64	2450	0.11 / 2.9	44.8 / 1.27	30
ART1240-9225-24-XLBK	24	0.11	2.64	2100	0.09 / 2.2	39.2 / 1.11	25
ART1241-9225-48-HBK	48	0.12	5.76	3200	0.18 / 4.7	58.3 / 1.65	38
ART1242-9225-48-MBK	48	0.10	4.80	2850	0.16 / 3.9	52.1 / 1.48	34
ART1243-9225-48-LBK	48	0.08	3.84	2450	0.11 / 2.9	44.8 / 1.27	30
ART1244-9225-48-XLBK	48	0.05	2.40	2100	0.09 / 2.2	39.2 / 1.11	25