

17251-DV


HOUSING	Aluminium die casting, painted black
IMPELER	Thermoplastic PBT, UL94V-0
BEARING	Ball
MOTOR TYPE	AC induction capacitor motor
TERMINATION	Terminals or lead wire
OPERATION VOLTAGE	85 to 245 VAC
DIELECTRIC STRENGTH	1500 VAC for 1 minute
INSULATION	10 M Ohms min. @ 500 Vdc
INSULATION RESISTANCE	Class A
OPERATING TEMPERATURE	-10 to +70 °C
SAFETY	Thermal protected
WEIGHT	1050 g
ROHS COMPLIANCE	Yes
ADDITIONAL	Tropi




SIZE

172 x 151 x 51 mm

DIMENSION

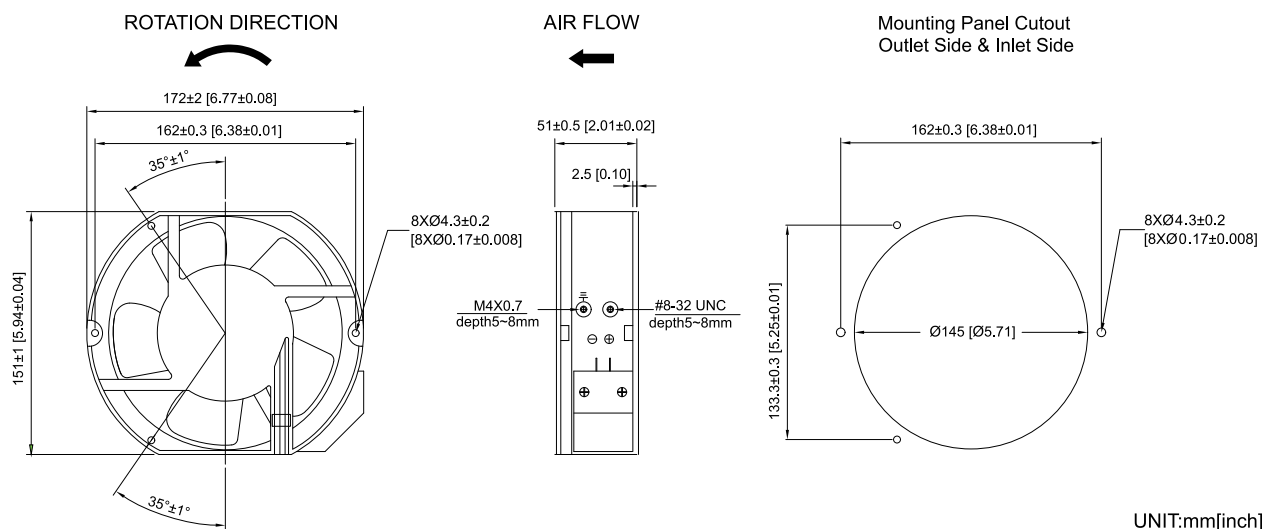

AIR PERFORMANCE

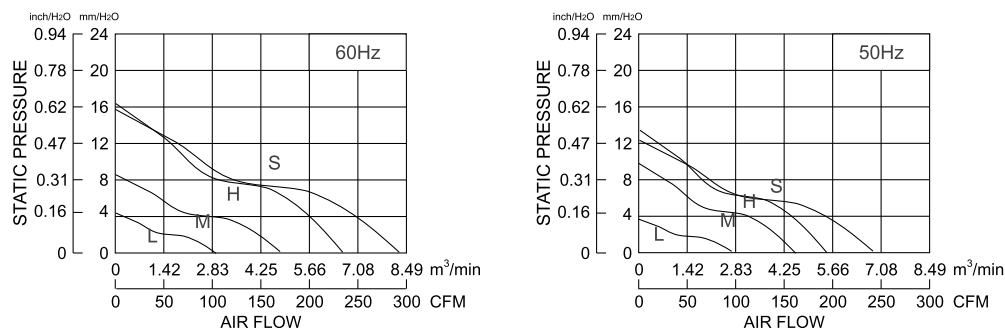

SPECIFICATION

MODEL NO	Rated Voltage	Frequency	Rated Current	Input Power	Speed	Maximum Air Pressure	Maximum Air Flow	Noise
	VAC	Hz	A	Watt	R.P.M.	inchH ₂ O - mmH ₂ O	CFM - m ³ /min	dB-A
ART1273-17251-DVS-S	115/230	50/60	0.41/0.38	41.9/42.1	2800/3250	0.48/0.62 - 12.3/15.8	240/286 - 6.8/8.0	56
ART1274-17251-DVH-S	115/230	50/60	0.23/0.25	26.7/29.7	2800/3200	0.52/0.54 - 13.4/16.4	190/235 - 5.4/6.6	50
ART1275-17251-DVM-S	115/230	50/60	0.15/0.19	16.1/21.0	2550/2400	0.37/0.33 - 9.4/8.6	165/170 - 4.7/4.8	40