

17238 METAL


HOUSING	Aluminium Die Casting painting black
IMPELER	Metal
BEARING	Ball
TERMINATION	Terminals
OPERATION VOLTAGE RANGE	50 Vac for 120 Vac Type/ 100 Vac for 230 Vac Type
DIELECTRIC STRENGTH	1500 Vac / 1 min
INSULATION	Class A
INSULATION RESISTANCE	100,000 Ohms min. @ 500 Vdc
OPERATION TEMPERATURE	-10 to +70 °C
SAFETY	Thermally Protected (Auto Restart)
WEIGHT	820 g
ROHS COMPLIANCE	Yes



SIZE


172 x 151 x 38 mm

DIMENSION

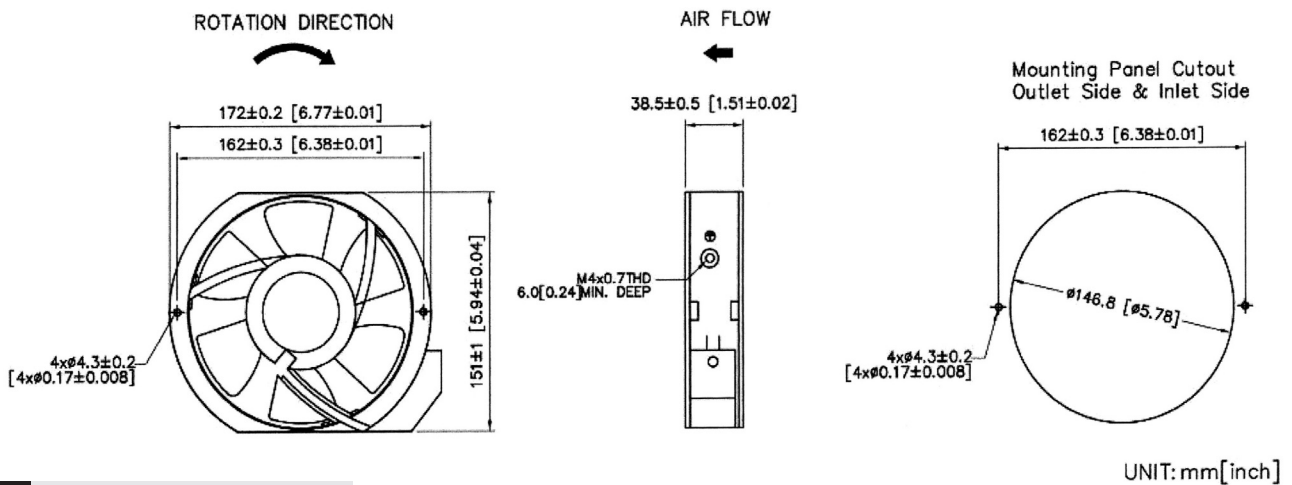

UNIT: mm[inch]

AIR PERFORMANCE

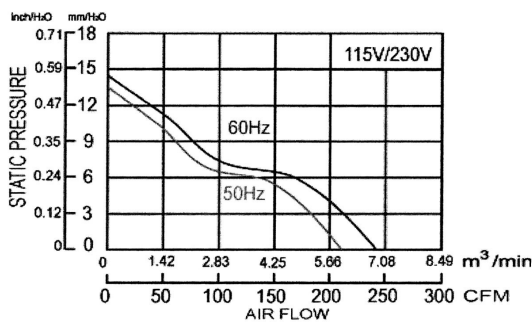

SPECIFICATION

MODEL NO	Rated Voltage	Frequency	Rated Current	Input Power	Speed	Maximum Air Flow	Maximum Air Pressure	Noise
	VAC		Amp	Watt	R.P.M.	CFM	mmH ₂ O	dB-A
ART1204-17238-230-HBTM-TROPI	230	50/60	0.11/0.12	26/27	2700/3100	210/240	13.5/14.5	52/50
ART1205-17238-230-HBTM	230	50/60	0.11/0.12	26/27	2700/3100	210/240	13.5/14.5	52/50
ART1213-17238-115-HBTM-TROPI	115	50/60	0.11/0.12	26/27	2700/3100	210/240	13.5/14.5	52/50
ART1214-17238-115-HBTM	115	50/60	0.11/0.12	26/27	2700/3100	210/240	13.5/14.5	52/50