


17238 TACHO

HOUSING	Die-Cast Aluminum, Painted Black
IMPELLER	Thermoplastic PBT, UL94V-0
BEARING	Ball
TERMINATION	Terminals, Lead wire
OPERATING VOLTAGE RANGE	50VAC for 120VAC Type/ 100VAC for 230VAC Type
DIELECTRIC STRENGTH	1,500VAC for 1 Minute
INSULATION	Class B or F
INSULATION RESISTANCE	100,000 Ohms min.@ 500 VDC
OPERATING TEMPERATURE	-20c to+ 80c
SAFETY	Thermally Protected (Auto Restart)
WEIGHT	693g
ROHS COMPLIANCE	Yes




SIZE 172X151X38mm (6.77"X6"X1.5")

DIMENSION

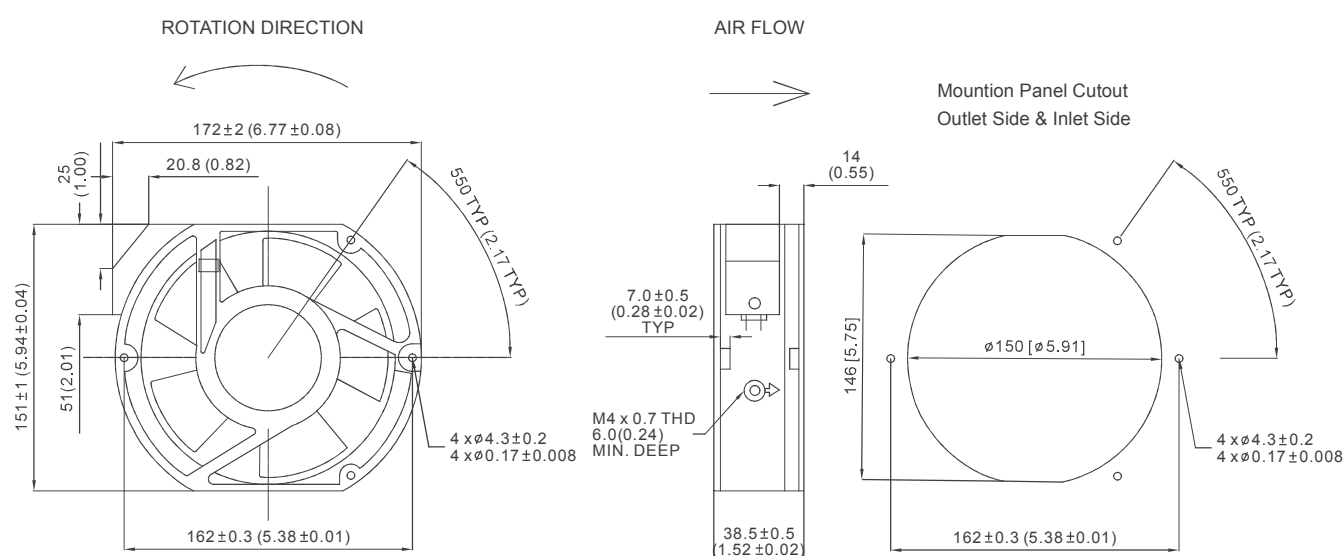

AIR PERFORMANCE

UNIT:mm(inch)

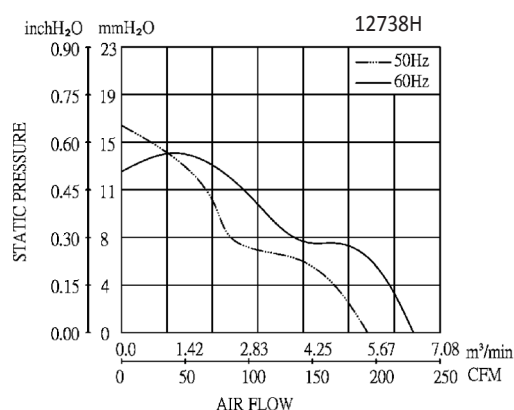

SPECIFICATION

MODEL NO.	RATED VOLTAGE (V)	FREQUENCY (Hz)	RATED CURRENT (A)	INPUT POWER (W)	SPEED RPM	MAX. AIR PRESSURE InchH ₂ O mmH ₂ O	AIR FLOW m ³ /min CFM	NOISE dB (A) @1M
ART1116 17238-230-HBT-TACHO	230	50/60	0.11/0.14	25/31	2800/3500	0.65/0.48 16.5/12.2	5.6/6.5 198/229	58/62